

Applying Multisensor Information Fusion Technology to Develop an UAV Aircraft with Collision Avoidance Model

by Dr. Buddy H Jeun and John Younker
Sensor Fusion Technology, LLC
4522 Village Springs Run
Dunwoody, GA 30338
678-662-9556

Contents

- Multisensor Target Acquisition Module
- Navigation equations
- The Extended Kalman Tracker Model
- Multisensor Correlation Module
- Multisensor Information Fusion Probability Model
- Traffic Alert and Collision Avoidance Module
- Analytical Method from the Theory of Estimation
- Geometrical Method
- Example
- Master Controller Module
- Conclusions
- References

Introduction

- The objective of this paper is to explore a new improved architectural design for the UAV or drone. Such aircraft, flown without pilots, have been in use for more than a decade. The UAV is primarily used for reconnaissance and surveillance, taking real-time pictures, and sending the images back to the military command/control center.
- With the proposed level of automation, this new UAV only needs a mission commander to provide high-level direction. The UAV can fly safely at all times and is completely guided by advance computer software based on the multiple target and multisensor information fusion technology.
- The most important component on-board the UAV is the master controller with GPS receiver. It guides the UAV based on the GPS system, from start-of-flight to end-of-flight at required destination and return to earth phase.
- The master controller with the help from the GPS system is constantly communicating with the following embedded advanced computer software modules:
 - Multisensor and target acquisition module
 - Extended Kalman Tracker module
 - Multisensor Correlation Module
 - Multisensor Information Fusion
 - Traffic Alert and Collision Avoidance Module

Multisensor Target Acquisition Module

- The multisensor target acquisition module employs a GPS receiver and advanced sensors such as APG radar, CNI and EW sensor, to keep track of own-ship and targets of interest.
- The multisensor module provides sensor information to the Extended Kalman Tracker module.
- The sensor information is then used to communicate with the traffic collision module and the master control module, so the unmanned aerial vehicle can fly safely without a pilot in the loop.

Multisensor Target Acquisition Module (continued)




Navigation equations

- GPS is the space based navigation satellite system, which provides location, and time information at any given time.
- From anywhere on earth, there is an unobstructed line of sight to four or more GPS satellites.
- The system provides critical capabilities to military, civil, and commercial users around the world.
- It is maintained by the United States government and is freely accessible to anyone with a GPS receiver

Navigation equations (continued)

- Below is a visual example of the GPS constellation in motion with the Earth rotating. Notice how the number of *satellites in view* from any given point on the Earth's surface, in this example at 45°N, changes with time.

Navigation equations (continued)

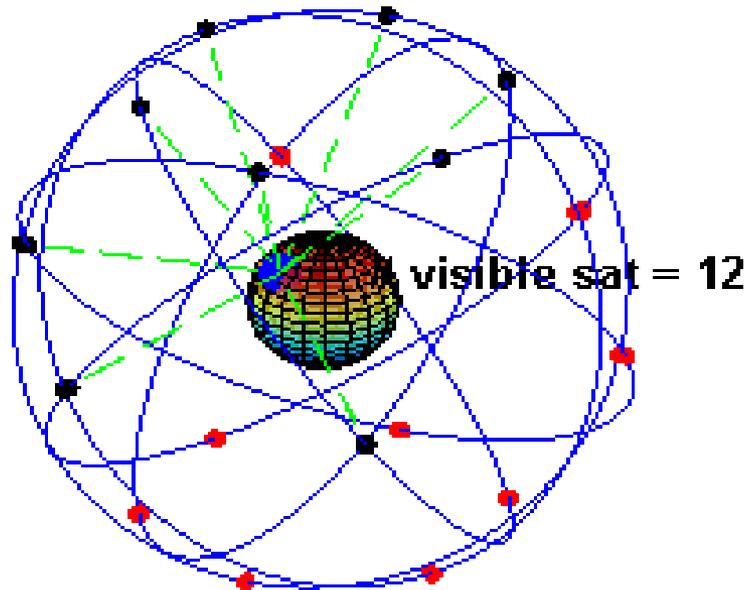

The Extended Kalman Tracker Model

- This target tracker model is responsible for taking input information from the sensor and target models, and tracking own-ship and the targets of interest at any given time.
- Mathematically, the Extended Kalman Tracker model can be defined as follows:
- $X_k = \varphi_k \times X_{k-1} + U$
- B. Propagating the state covariance matrix (U):
- $P_k = \varphi_k \times P_{k-1} \times \varphi_k^T + Q$
- C. Kalman gain matrix (U):
- $K = P_k X H_t X \text{inv}\{ H X P_k X H_t + R \}$
- D. Gating algorithm (U):
- $G = (Z - H * X_k)^t * \{ H * P * H^T + R \}^{-1} * (Z - H * X_k)$
- E. Updated state covariance matrix (U):
- $P_{k+1} = P_k * (I - G * H)$
- F. Updated state vector (U):
- $X_{k+1} = X_k + G * (Z - H * X_k)$

The Extended Kalman Tracker Model (continued)

- where:
- U = Noise Vector
- ϕ_k = Transition Matrix
- Q = Noise Covariance Matrix
- R = Measurement Noise Matrix
- X_k = State Vector at time k
- P_k = State Covariance Matrix at time k
- H = Jacobian Matrix
- G = Gating Matrix
- K = Kalman Gain Matrix
- Z = Measurement vector

The Extended Kalman Tracker Model (continued)

- The Extended Kalman Tracker is one of the most widely used trackers. Track accuracy is very good.
- However, as equations C, D, and E indicate, matrix inversion is required in every calculation for each sensor update.
- Matrix inversion is intensive processing and will slow down total track processing and degrade track accuracy.

Multisensor Correlation Module

- The Multisensor Correlation Module is responsible for correlating all target of interest.
- It takes input from the Extended Kalman Tracker, and outputs the results of the correlated targets of interest to the Multisensor Information Fusion Probability Module.

Multisensor Correlation Module (continued)

- Decision rules for the multisensor correlation module are:
 - (1) If $0.95 \leq R(X,Y) \leq 1.0$,
then X and Y are most likely correlated
 - (2) If $0.0 \leq R(X<Y) \leq 0.95$,
then X and Y are most likely NOT correlated.
- The boundary condition, 0.95, is selected based on the feature vector element's precision.

Multisensor Information Fusion

Probability Model

- This probability model is used to calculate the fused probability of all detected targets of interest. Fused probability is defined as the probability of the target being in the multisensor environment. For example, suppose there are two targets reported by three sensors, such as radar, communication navigation and identification (CNI), and electronic warfare (EW). The multisensor information fusion probability model will calculate the probabilities for the two targets as :



$$P(T_1 / S_1, S_2, S_3) = 0.3$$

That is, the probability of target T_1 is 0.3 in the three-sensor environment.

$$P(T_2 / S_1, S_2, S_3) = 0.7$$

That is, the probability of target T_2 is 0.7 in the three-sensor environment.

Multisensor Information Fusion Probability Model (continued)

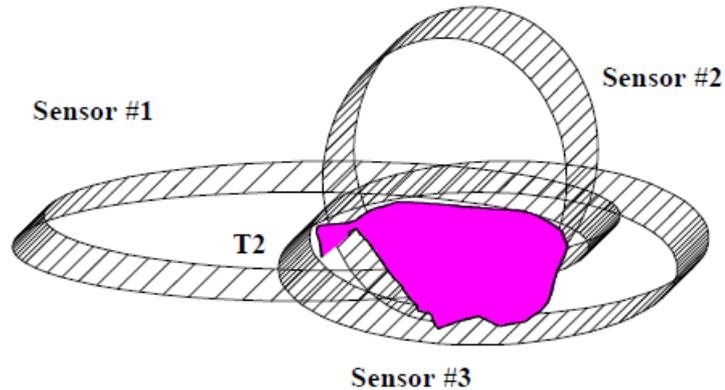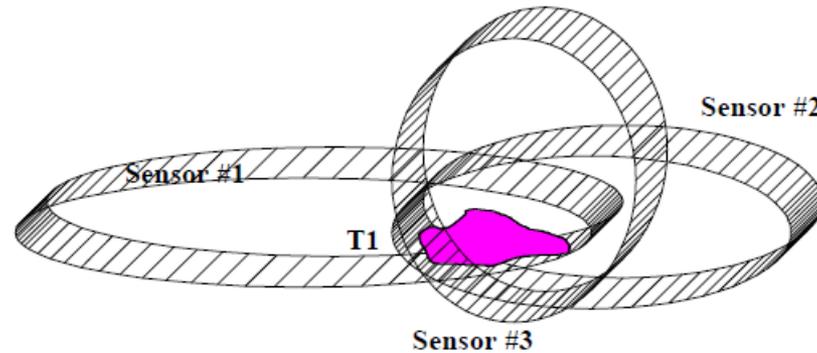

Multisensor Information Fusion

Probability Model (continued)

- The fused target probability for the multisensor and multiple targets can be expressed as [Hall, 1992]:

$$P\left(\frac{T_k}{S_1.S_2.S_3...S_n}\right) = \frac{\left\{P\left(\frac{S_1}{T_k}\right) \times P\left(\frac{S_2}{T_k}\right) \times P\left(\frac{S_3}{T_k}\right) \times \dots \times P\left(\frac{S_n}{T_k}\right)\right\}}{\left\{\sum_{i=1}^n \left[P\left(\frac{S_1}{T_i}\right) \times P\left(\frac{S_2}{T_i}\right) \times \dots \times P\left(\frac{S_n}{T_i}\right)\right]\right\}}$$

- Where:

- $P\left(\frac{T_k}{S_1.S_2.S_3...S_n}\right)$ is the probability of target T_k in the multisensor environment.
- For the single sensor with multiple targets, the fused target probability reduces to the following:

$$P\left(\frac{T_k}{S}\right) = \frac{\left\{P\left(\frac{S}{T_k}\right)\right\}}{\left\{\sum_{i=1}^n \left[P\left(\frac{S}{T_i}\right)\right]\right\}}$$

[Jeun, 1979]

- This expression is exactly the same as the probability of association.

Traffic Alert and Collision Avoidance Module

- The Traffic Avoidance Module is the new feature of this UAV avionics architecture. It receives own-ship and target feature pattern vectors from the Multisensor Information Fusion Probability Model. Here in this traffic avoidance module, the critical target track information is used to estimate the exact location, speed, and track of targets. With that information, looking ahead in time, possible collisions can be predicted. This life and death collision information will output to the UAV Master Control Module and the Master controller can take immediate action to avoid the collision.

Traffic Alert and Collision Avoidance Module (continued)


- The major function of the traffic avoidance module is to estimate the possible collision parameters, such as the location, time and speed that the collision may happen. Here two new techniques are proposed; one is the analytical method from the theory of estimation; and the other is a geometrical method. Each method has its own distinct merits, depends on what detailed information is available from the Extended Kalman Tracker module.

Traffic Alert and Collision Avoidance Module (continued)

- Analytical Method from the Theory of Estimation
- The Traffic Avoidance Module receives more than thirty observation points in each frame (in general, one frame is 40 milliseconds) from the Extended Kalman tracker module. It then applies the so-called “least squares” method to the observation points to obtain the algebraic functions for the targets. Say, $Y_1(t)$ is own-ship and the target of interest is $Y_2(t)$. Then solve the two algebraic equations: $Y_1(t)$ for the own-ship, and $Y_2(t)$ for the target of interest.
- For the actual value of t , substitute the value of t of either $Y_1(t)$ or $Y_2(t)$ for the value of Y_1 or Y_2 . The point (y_1, t) or point of (y_2, t) is the possible location at which the own-ship and the target of interest will collide with each other. After the location of collision is determined, the time and speed of collision can be solved by simple physics techniques.

Traffic Alert and Collision Avoidance Module

Analytical method

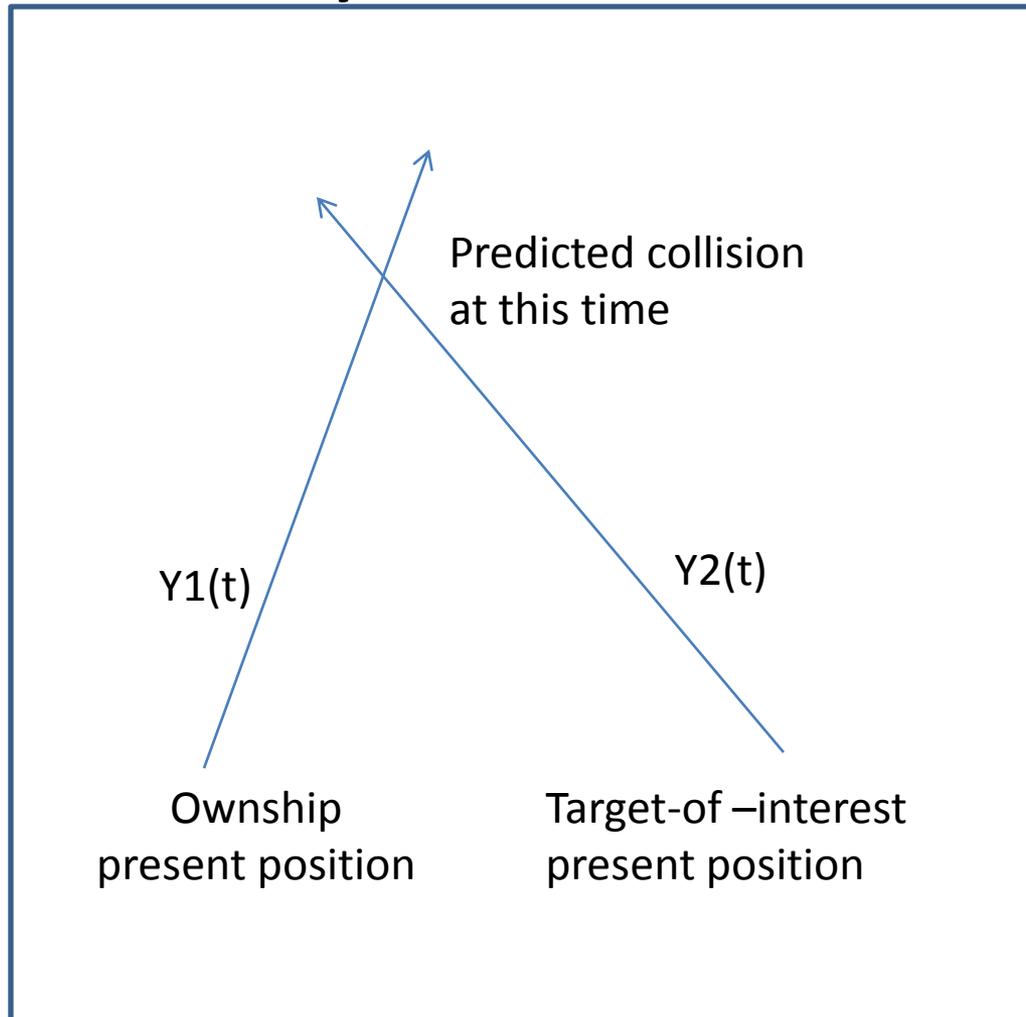


Traffic Alert and Collision Avoidance Module

Geometrical Method

- This method applies a graphical solution technique to the heading and velocity vector for own-ship. Say, for example, HD1 and V1 are the heading and velocity vectors for own-ship. Similarly, say, HD2 and V2 are the heading and velocity vectors for a target of interest. Denote the length between the north-referenced point of HD1, and V1, by L1. Similarly, denote the length between the north-referenced point of HD2, and V2, by L2.

Traffic Alert and Collision Avoidance Module

Geometrical Method

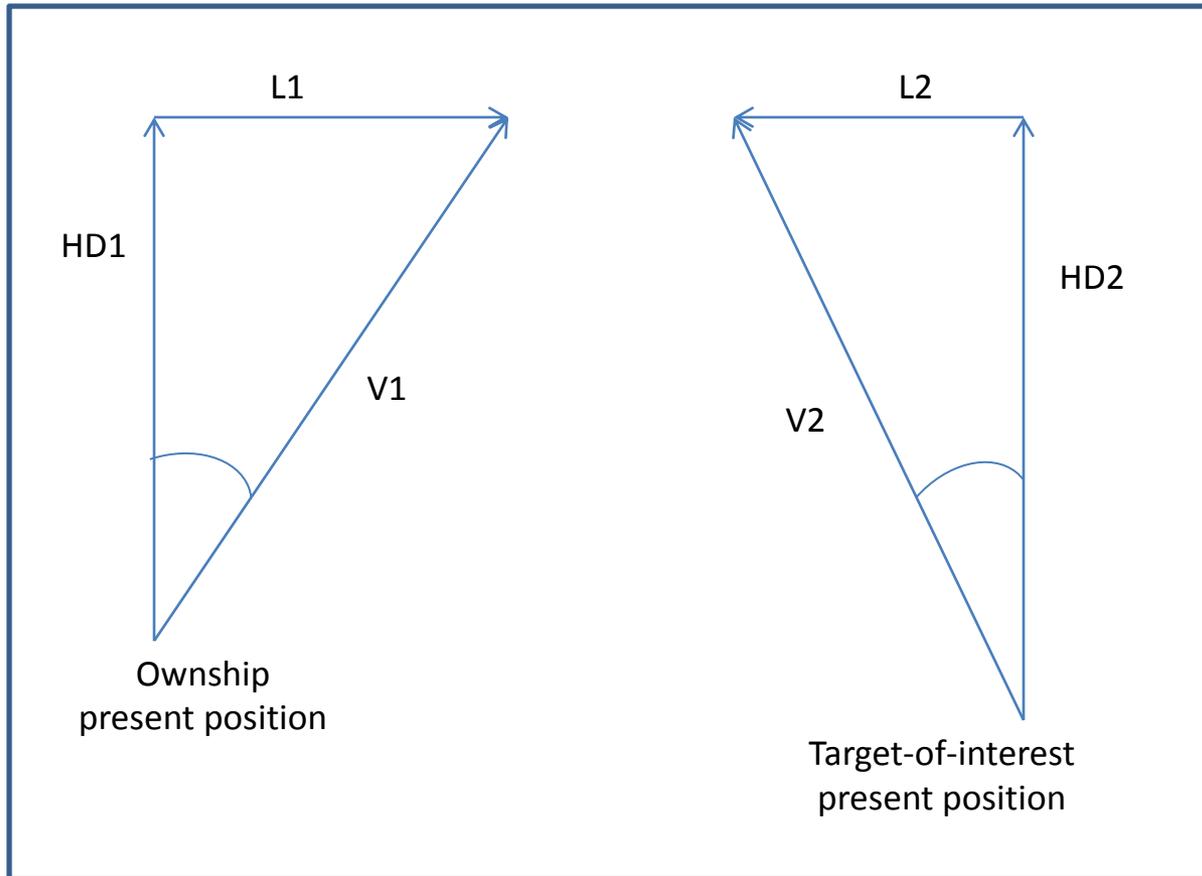


Traffic Alert and Collision Avoidance Module

Example

- Following is a simulated solution for the determination of location at which two aircraft could collide with each other. The estimation of the point of collision is essential for avoidance of the collision.
 - A. Taking a series of points from the Extended Kalman Tracker for own aircraft and target aircraft and using “least square method”, we obtain an algebraic equation for the velocity vector for own aircraft and the target aircraft as following:
 - $Y = X$ (equation for the velocity vector of own aircraft)------(1)
 - $Y = 16 - X$ (equation for the velocity vector of the target aircraft)------(2)
 - B. To estimate the interception point between these two equations as the point of collision we set equation (1) equal to equation (2) as follows
 - $X = 16 - X$ -----(3)
 - That is $2X = 16$
 - Finally $X = 8$
 - Now substituting $X = 8$ into equation (1) or equation (2) , we have
 - $Y = 16 - X$
 - $Y = 16 - 8$
 - $Y = 8$
 - C. The required solution for the point of collision between these two aircrafts is P(8,8). This is just a simulated solution to demonstrate our concept of collision avoidance of between two aircraft.

Traffic Alert and Collision Avoidance Module Example

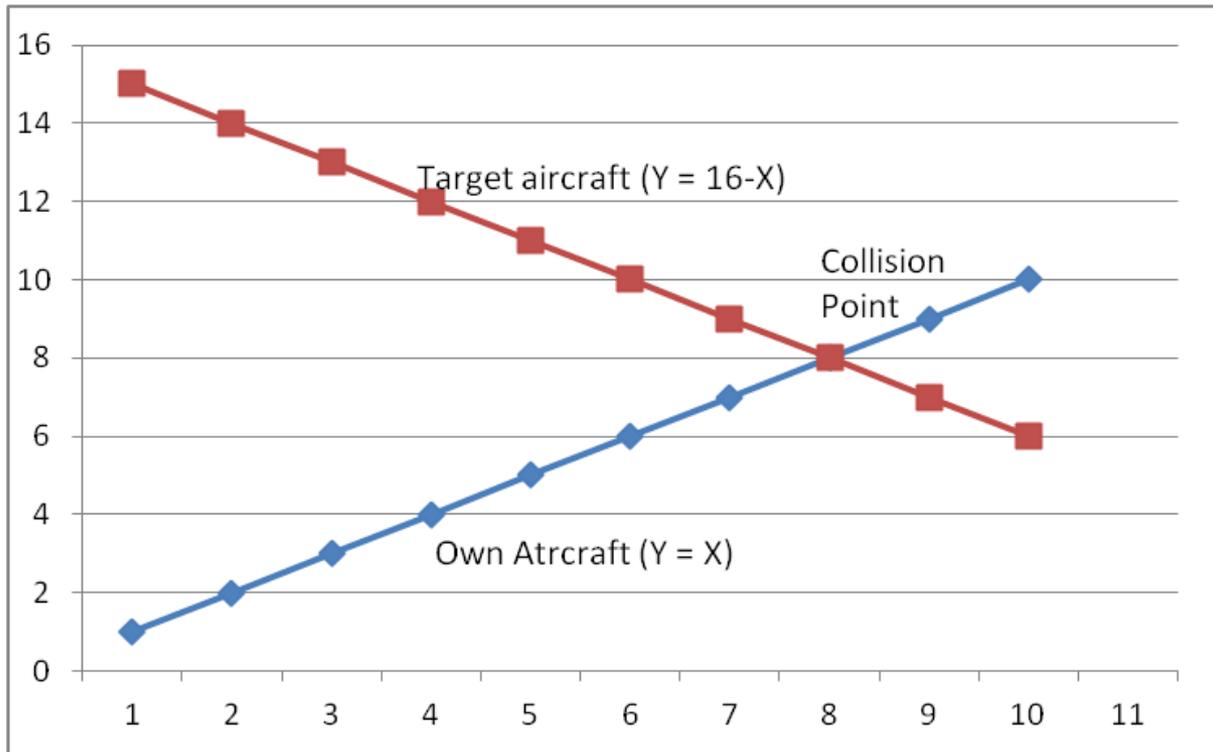

Master Controller Module

- The Master Controller module in this UAV avionics architecture acts like an intelligent human pilot guiding the UAV safely through its assigned mission. The newly proposed UAV with Traffic Alert and Collision Avoidance Module is 100% controlled and guided by the computer software modules.
- The Master Controller is the master of all modules onboard the UAV. Equipped with GPS receiver, it receives from the GPS satellites. It provides navigation information, such as target and own-ship location information from the satellite navigation system. At the same time, the Master Controller is communicating and monitoring all other computer software modules.

Master Controller Module (continued)

- The software modules onboard the UAV are:
 - Multisensor and Target Acquisition Module
 - Multisensor and Multiple Target Tracker
 - Multisensor Correlation Module
 - Multisensor Information Fusion Probability Module
 - Traffic and Collision Avoidance Module

Master Controller Module (continued)

- The most important responsibility of the Master Controller is guiding the UAV navigating through the earth safely. The Traffic alert and collision avoidance module provides target location information and target parameters such as heading, velocity vector, target feature vector, and time of possible collision to the Master Controller. As soon as the collision target parameters reach the Master Controller, the warning signal is sent through the UAV. Immediately the Master Controller approves all actions to avoid the possible target collision. Location and time at which the UAV and Target of interest will collide are calculated by the traffic alert and collision avoidance module. The master controller takes immediate action before the collision occurs. The new UAV is guided by the Master Controller, Traffic Alert and Collision Avoidance Module, other onboard computer software modules, and the GPS system. It can fly freely anywhere on earth without a human pilot.

Conclusions

- The current proposed UAV is in the exploration phase. The onboard master controller is 100% guided by advanced embedded computer software, and communicates with the advanced GPS System, that includes the 24 navigation satellites orbiting the earth with unobstructed view of at least 4 satellites, which will provide target location information to the UAV anywhere on earth and at anytime. In addition, the newly proposed UAV is guided with a multisensor and multiple target tracker. This tracker is the most advanced target tracker in the field. It uses the Extended Kalman tracker that has been implemented on advanced fighter jets, and airborne surveillance aircraft. Therefore, the authors firmly believed that the new UAV with traffic alert and collision avoidance module, will become a new standard architecture for UAVs.
- Further in the future, this same multisensor information fusion technology with advanced GPS system could also be applied to guiding driverless automobiles. Future automobiles could be on the road with improved safety due to computer guidance being more reliable than human drivers. This is a very important next step considering the rapidly aging population of developed countries.
- When nanotechnology is combined with multisensor information fusion technology and the advanced GPS system, this concept can be applied to development of future unmanned airborne vehicles (UAV). The size of the future UAV will be smaller which will further reduce detection in the air and save on fuel.

References

- 1 [N. E. Nahi, 1969] Theory of Estimation and Application, Wiley, New York
- 2 [S. J. Leon, 2006] Linear Algebra with Application, Pearson Prentice Hall, New York
- 3 [Jeun and Younker, and Hung, 2003] Buddy H Jeun and John Younker, and Chih-Cheng Hung, "A Nuclear Plume Detection and Tracking Model for the Advanced Airborne Early Warning Surveillance Aircraft," the 8th ICCRTS, National Defense University, Washington, DC, June 17 – 19, June 2003.
- 4 [Sorenson, 1985] Harold W. Sorenson, *Kalman Filtering: Theory and Application*
- 5 Wikipedia.org /wiki/global position system
- 6 [Jeun, 1997] A Multisensor Information Function Model Cisc-97 Joint Service Combat Identification System Conference Technical Proceedings, 1997
- 7 [Hall, 1992] Mathematical Techniques In Multisensor Data Fusion, Artech House, 1992
- 8 [Jeun, 1979] The Design and Implementation of an Improved Multivariate Classification Scheme, College of Electrical Engineering, University of Missouri, U.S.A.